GUSELLA-BAKKER
NORTH AMERICA

SCW

Ton. 11,0 - 37,0

WASTE MATERIAL
RUBBLE

SCW grabs are the ideal equipment for light and voluminous materials like municipal waste, plastic, paper etc....

Reduced height due to special GRI Swivel ring rotator.

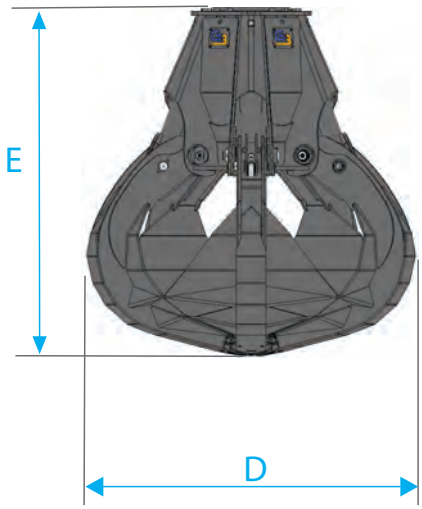

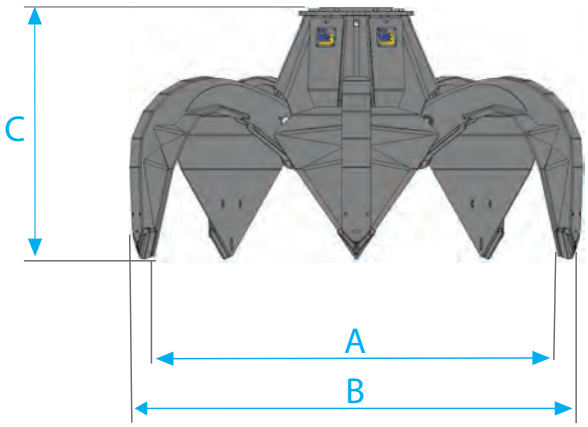

Type of link

Type of teeth



Model	Link type	Teeth available		Capacity	Weight	Load	Pressure	Teeth		Dimensions				
		Standard	Special	Lt.	Kg.	Ton.	Max Bar	N.	Ton.	A	B	C	D	E
SCW 555	PE	0	1	550	750	3,5	360	5	11-18	2010	2180	1090	1300	1440
SCW 555	K (16 ton)	0	1	550	852	3,5	360	5	11-18	2010	2180	1330	1300	1690
SCW 555	E12 (GRI12)	0	1	550	1020	3,5	360	5	11-18	2010	2180	1370	1300	1730
SCW 805	PE	0	1	800	1125	4	360	5	15-24	2225	2410	1270	1645	1690
SCW 805	E12 (GRI12)	0	1	800	1350	4	360	5	15-24	2225	2410	1550	1645	1970
SCW 805	E16 (GRI16)	0	1	800	1570	4	360	5	15-24	2225	2410	1590	1645	2010
SCW 1105	PE	1	0	1100	1850	5,5	360	5	22-37	2540	2790	1450	1880	1950
SCW 1105	E12 (GRI12)	1	0	1100	2075	5,5	360	5	22-37	2540	2790	1730	1880	2225
SCW 1105	E16 (GRI16)	1	0	1100	2095	5,5	360	5	22-37	2540	2790	1770	1880	2265

Weight classes refer to standard teeth

This data is indicative. To choose the correct attachment check excatavor lifting capacities.

OPTIONS



Check valve

Excavator link (AG 120)

Easy link for excavators (AG 121)

Suspension plate male (AA 120)

Mechanical rotator (AD 120)

Active Control Grip

GUSELLA-BAKKER
NORTH AMERICA

info@gbna-attachments.com
GusellaBakkerNorthAmerica.com

THE MANUFACTURER MAINTAINS THE RIGHT TO MODIFY ALL PRODUCTS IN ORDER TO IMPROVE PERFORMANCE